

# Rodded Boretrak®


[www.renishaw.com/mining](http://www.renishaw.com/mining)

## Specification

Construction		
Probe	316 stainless steel	
Rods	Glass fibre rods, acetal joints, and stainless steel quick-release joints, nuts and bolts	
Rack	Tubular aluminium	
CDU	Black acetal	
Physical	Weight	Dimensions
Probe	2.5 kg	660 mm × 37 mm (L × Dia)
Rods	400 g	1000 × 25 mm (L × Dia)
CDU	800 g	210 mm × 102 mm × 41 mm
Sensor		
Range	+/- 45° from vertical – upwards or downwards	
Accuracy	0.1°	
Resolution	0.01°	
CDU		
Display	128 × 64 graphic backlit	
Keypad	4 × 4	
Memory	64 KB	
Data download	RS232 (9600 baud rate)	
Power system		
Probe	3 × 1.5V C (MN1400, LR14) cells	
CDU	Internal rechargeable batteries – 1000 recharge cycles	
CDU charger	100-240 V ac input	
Environmental		
Probe	Waterproof (pressure rated to 300 m)	
CDU	IP66	
Operating temperature	-10 °C to +60 °C	
Storage temperature	-20 °C to +70 °C	

For further information and the best possible application and performance support please contact [www.alphageofisica.com.br](http://www.alphageofisica.com.br)

## Rodded Boretrak dimensions

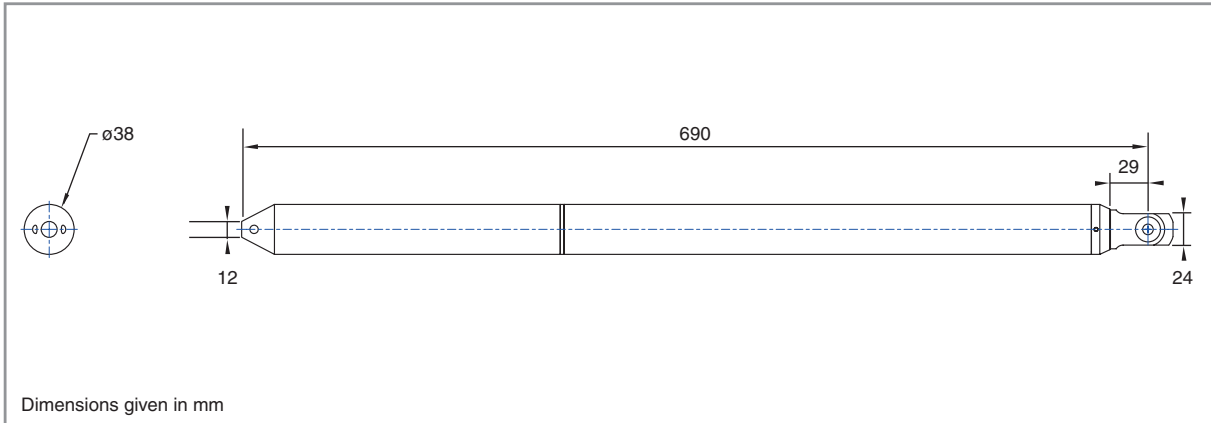

For worldwide contact details, please visit our main website at [www.renishaw.com/contact](http://www.renishaw.com/contact)

RENISHAW HAS MADE CONSIDERABLE EFFORTS TO ENSURE THE CONTENT OF THIS DOCUMENT IS CORRECT AT THE DATE OF PUBLICATION BUT MAKES NO WARRANTIES OR REPRESENTATIONS REGARDING THE CONTENT. RENISHAW EXCLUDES LIABILITY, HOWSOEVER ARISING, FOR ANY INACCURACIES IN THIS DOCUMENT.

